PHILIPS

Lighting



TL-D Colored

TL-D Colored 18W Blue 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h

Light technical	
Color Code	180
Luminous Flux (Nom)	400 lm
Luminous Flux (Rated) (Nom)	400 lm
Color Designation	Blue (B)
LLMF 2000 h Rated	85 %

Operating and electrical	
Power (Nom)	18.0 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	59 V

Temperature	
Design Temperature (Nom)	25 °C

Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Bulb Shape	T8 [26 mm (T8)]


Approval and application	
Mercury (Hg) Content (Nom)	13.0 mg
Energy Consumption kWh/1000 h	23 kWh

TL-D Colored

Product data	
Full product code	871150072690240
Order product name	TL-D Colored 18W Blue 1SL/25
EAN/UPC - Product	8711500726902
Order code	928048001805
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	928048001805
Copy Net Weight (Piece)	71.000 g


Dimensional drawing

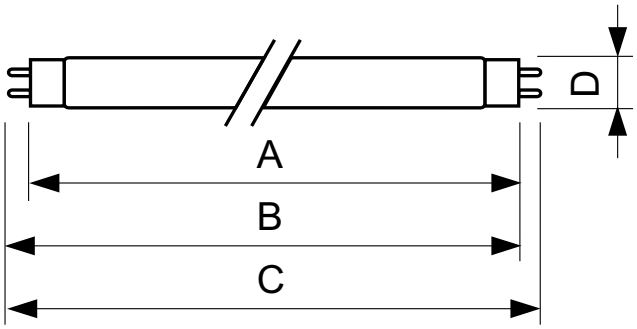

TL-D Colored 18W Blue 1SL/25

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 18W Blue 1SL/25	28.0 mm	589.8 mm	596.9 mm	594.5 mm	604.0 mm

Photometric data

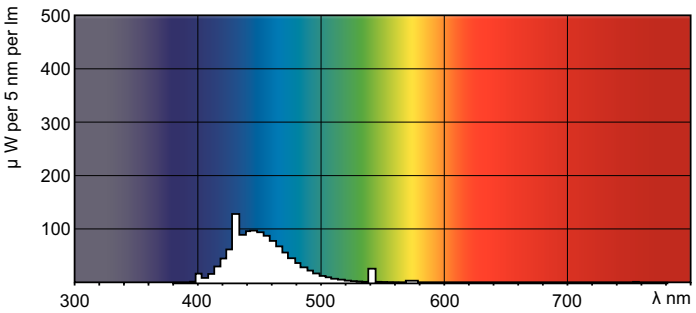

LDPB_TL-DCOL_180-Spectral power distribution B/W

LDPO_TL-DCOL_180-Spectral power distribution Colour

© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.