

MASTER SON PIA Plus

MASTER SON PIA Plus 250W/220 E40 1SL/12

High Pressure Sodium lamp with opalized ovoid outer bulb, high output and long reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	20500 h
Life To 10% Failures (Nom)	24000 h
Life to 20% Failures (Nom)	28000 h
Life to 50% Failures (Nom)	36000 h
System Description	External Ignitor
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	98 %
LSF 20000 h Rated	95 %

Light Technical	
Color Code	220 [CCT of 2000K]
Luminous Flux (Rated) (Nom)	30600 lm
Chromaticity Coordinate X (Nom)	530
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	119.07 lm/W
Color Rendering Index (Max)	25
LLMF 2000 h Rated	99 %
LLMF 4000 h Rated	98 %
LLMF 6000 h Rated	97 %
LLMF 8000 h Rated	96 %
LLMF 12000 h Rated	96 %
LLMF 16000 h Rated	95 %
LLMF 20000 h Rated	94 %
Ratio Scotopic/Photopic Lumens	0.60

MASTER SON PIA Plus

Operating and Electrical	
Power (Nom)	257.0 W
Lamp Current (EM) (Nom)	0.291 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	120 s
Ignition Time (Max)	10 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	102 V

Controls and Dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	5 min

Mechanical and Housing	
Bulb Finish	Coated glass


Approval and Application	
Energy Efficiency Label (EEL)	A+

Mercury (Hg) Content (Nom)	15.1 mg
Energy Consumption kWh/1000 h	283 kWh

Luminaire Design Requirements	
Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	250 °C

Product Data	
Full product code	871150019344515
Order product name	MASTER SON PIA Plus 250W/220 E40 1SL/12
EAN/UPC - Product	8711500193445
Order code	928153309830
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928153309830
Net Weight (Piece)	0.170 kg
ILCOS Code	SE-250-H/S-E40


Dimensional drawing




SON PIA Plus 250W/220 E40

Product	D (max)	C (max)
MASTER SON PIA Plus 250W/220 E40 1SL/12	91 mm	227 mm

Photometric data

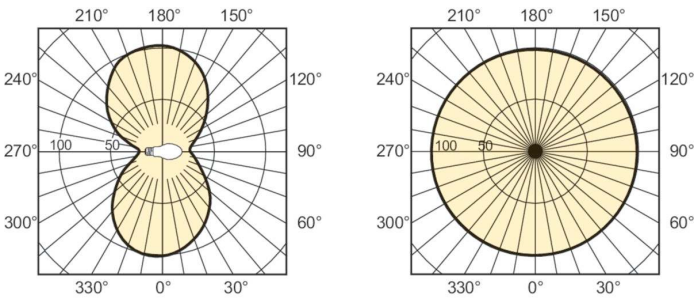


LDLD_SON-PIA_0001-Light distribution diagram

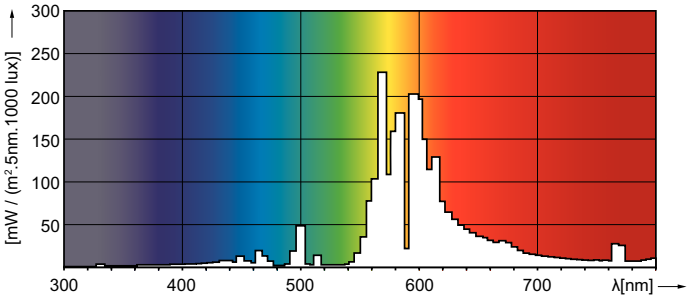


LDPO_SON-PIA_0001-Spectral power distribution Colour

MASTER SON PIA Plus

Lifetime

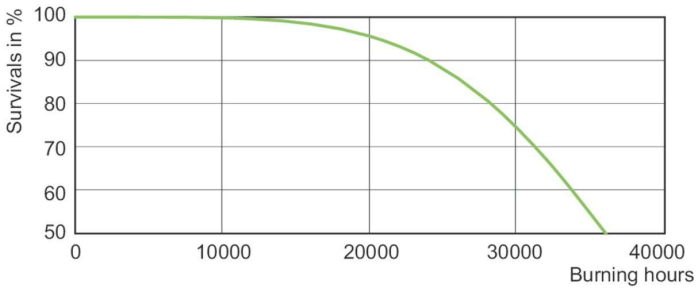

LDLE_SON-PIA_0004-Life expectancy diagram

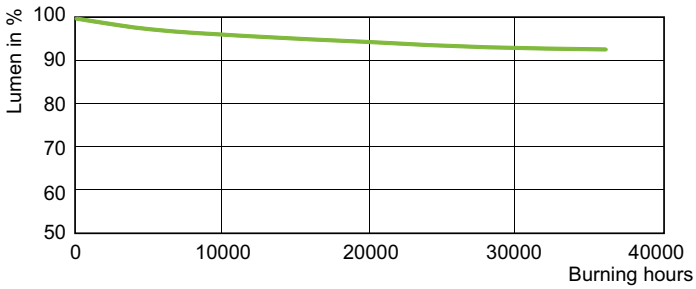

LDLM_SON-PIA_0004-Lumen maintenance diagram

© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.