
PRODUCT DATASHEET
HALOLINE PRO 120 W 230 V R7S

HALOLINE® PRO | Double ended halogen lamps with tube base

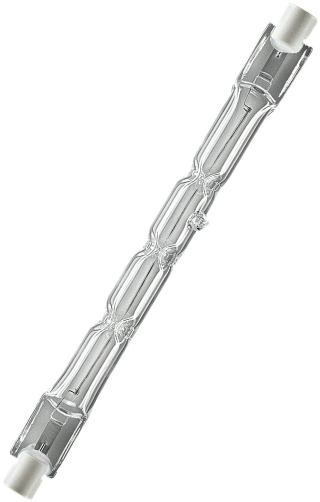

Areas of application

- General illumination
- Entrance lighting
- Pathway lighting
- Outdoor applications only in suitable luminaires
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings
- Ideal for emphasizing and accentuating the structure of a room

Product benefits

- Brilliant accent lighting
- Direct replacement for standard tubular halogen lamps
- Significantly lower CO_2 emissions compared to standard version
- Lower thermal output (compared with the standard reference product)
- No transformer required
- Contains no mercury

Product features

- Average life: 2,000 h
- Dimmable
- Color rendering index R_a: 100



© 2023, LEDVANCE GmbH. All rights reserved.


TECHNICAL DATA

Electrical data

Nominal wattage	120 W
Construction wattage	120.00 W
Nominal voltage	230 V
Claimed equiv. conventional lamp power	150 W

Photometrical data

Luminous flux	2220 lm
Luminous efficacy	18 lm/W
Light color (designation)	Warm White
Color temperature	2900 K
Color rendering index Ra	100
Light color	1029
UV protection	No



Light technical data

Starting time	0 s

Dimensions & Weight

Overall length	114.20 mm
Diameter	12.00 mm
Product weight	7.5 g

Lifespan

Lifespan	2000 h

Additional product data

© 2023, LEDVANCE GmbH. All rights reserved.

Base (standard designation)	R7s
Mercury-free	Yes
Design / version	Tube
Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 / For outdoor applications and operation in damp locations special approved fixtures are required / Technical and light values are subject to be changed

Capabilities

Dimmable	Yes
Burning position	Any

Certificates & Standards

Energy efficiency class	G
Energy consumption	120.00 kWh/1000h

Country-specific categorizations

ILCOS	HDG-120-230-R7s-114,2
Order reference	64696 ECO

Energy labelling regulation data acc EU 2019/2015

Lighting technology used	OTHER
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	R7s
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Claim of equivalent power	No
Length	114.20 mm
Height	12.00 mm
Width	12.00 mm
Chromaticity coordinate x	0.444
Chromaticity coordinate y	0.406
Beam angle correspondence	SPHERE_360

© 2023, LEDVANCE GmbH. All rights reserved.

EPREL ID	714434
Model number	AC35303,AC35303,AC35303

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321977670	Folding box 1	126 mm x 18 mm x 21 mm	15.00 g	0.05 dm^3
4008321977687	Shipping box 20	137 mm x 77 mm x 112 mm	301.00 g	1.18 dm^3
4058075308695	Shipping box 15	93 mm x 71 mm x 128 mm	328.00 g	0.85 dm^3
4058075308701	Shipping box 60	195 mm x 148 mm x 133 mm	1459.00 g	3.84 dm^3
4052899401280	Shipping box 720			

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2023, LEDVANCE GmbH. All rights reserved.